HINGES

The pivot point for
every door in the home.



Windsor ARCHITECTURAL HARDWARE

WHICH HINGE?

A hinge bears the full weight of a door across its lifetime, enabling smooth, controlled movement every time it opens and closes. Our hinge collection covers every door in the home, from invisible hinges that close themselves to solid brass hinges finished to match your handles.

TORQ

For doors that should close themselves.
A hidden self closing hinge for everyday internal doors, like laundries, pantries and doors between living spaces. Adjustable closing speed and 2 closing settings. Doors up to 100kg.

ARLU Invisible Hinges

For doors you want to fine tune.
A hidden hinge with 3D adjustment after the door is hung and a 180° opening. For architectural projects where the door needs to sit perfectly in the frame. Doors up to 115kg.

ARLU Pivot Closers

For a frameless pivot door.
Pivots centrally, off centre or at the corner, on doors up to 3m tall and 150kg. For internal feature doors where the door itself is the design.

Stainless Steel + Solid Brass

For a hinge you can see.
Classic hinges finished to match the door handles, with stocked and signature options across both ranges.

Lift Off Hinges

For doors you need to take off.
Allows the door to lift straight off its hinges without unscrewing anything, which helps when moving furniture through or painting. Solid brass, in left and right handed versions.


ARLU Invisible Hinges


ARLU Pivot Closers


TORQ


Lift Off Hinges


Stainless Steel + Solid Brass

TORQ

Invisible Hydraulic Self Closing Hinge



9860 Invisible Hydraulic Hinge W65
9850 Invisible Hydraulic Hinge W90
9870 Invisible Hydraulic Hinge W100

STOCKED **BLK**, BN, GN, MSB, OR

Some models are labelled SLOW–FAST, others MUTE–LOCK. Both work the same way.

Invisible Non-Hydraulic Hinge



9861 Invisible Non-Hydraulic Support Hinge W65
9851 Invisible Non-Hydraulic Support Hinge W90
9871 Invisible Non-Hydraulic Support Hinge W100

STOCKED BLK, BN, GN, MSB, **OR**

Features

Concealed Self Closing
Controlled hydraulic closing without an overhead door closer, with hinges completely concealed when the door is closed.

90° Hold Open
TORQ hydraulic hinges hold the door open at 90°, with free stay between 90° and 180°.

Adjustable Closing Speed
An integrated control wheel adjusts closing speed, with fast closing from 85° and slower closing from 30°.

Two Closing Settings
Select a muted close, or an entry lock setting that engages the latch over the final 10°.

Suits Doors Up To 100kg
3 hinge sizes suit doors from 20kg to 100kg, with configurations specified by door weight and height.

Five Finish Options
Available in Matt Black, Brushed Nickel, Graphite Nickel, Matt Satin Brass and Oil Rubbed Bronze.*

*Finishes on TORQ hinges are a close match to our standard and signature finishes, however due to how they are manufactured there may be some variation.

TORQ Technical Information

Specs	W65	W90	W100
Codes	9860, 9861	9850, 9851	9870, 9871
Dimensions	25mm × 155mm × 28.5mm	28mm × 177mm × 34mm	30mm × 194mm × 36mm
Minimum door thickness	35mm	38mm	38mm
Door weight	20–65kg	30–90kg	40–100kg

Hinge quantity	W65	W90	W100
1× Hydraulic Hinge & 1× Support Hinge	<20kg door	<30kg door	<40kg door
2× Hydraulic Hinges	<45kg door	<50kg door	<60kg door
2× Hydraulic Hinges & 1× Support Hinge	<55kg door	<70kg door	<80kg door
3× Hydraulic Hinges	<65kg door	<90kg door	<100kg door

If door height exceeds 2100mm, add an additional hinge.
Support hinges can be used without hydraulic hinges.

Scan here to learn more about TORQ

ARLU

Invisible Hinges



9811 Invisible NEO S-5

STOCKED AB, BLK, **PB**, SS



9812 Invisible NEO M-6

STOCKED **AB**, BLK, PB, SS

Features

3D Adjustability
Adjust height, width and depth without taking the door off, with no wedge needed for height.

180° Opening
ARLU invisible hinges open a full 180°, suiting both left and right opening doors.

One Person Installation
The easy hook system allows installation and adjustment by one person, saving time on site.

Tested To 200,000 Cycles
Cycle tested to a minimum of 200,000 openings and closings for long term performance.

Suits Doors Up To 115kg
Two hinge sizes suit doors up to 115kg, with configurations specified by door weight and width.

Four Finish Options
Available in Antique Bronze, Matt Black, Polished Brass and Stainless Steel.**

**Finishes on ARLU hinges are a close match to our standard and signature finishes, however due to how they are manufactured there may be some variation.

ARLU Invisible Hinges Technical Information

Specs	NEO S-5	NEO M-6
Code	9811	9812
Dimensions	120mm × 25mm	140mm × 28mm
Minimum door thickness	33mm	36mm
Door weight	60–95kg	80–115kg
Overall depth	26.5mm (frame) 30mm (door)	30mm (frame) 32mm (door)
Height adjustment	-2.5 / +2.5mm	-3.0 / +3.0mm
Width adjustment	-3.0 / +4.0mm	-3.0 / +4.0mm

Hinge quantity	Door width	NEO S-5	NEO M-6
2× Hinges	730mm 830mm 930mm 1030mm	<75kg door <70kg door <65kg door <60kg door	<95kg door <90kg door <85kg door <80kg door
3× Hinges	730mm 830mm 930mm 1030mm	<95kg door <90kg door <85kg door <80kg door	<115kg door <110kg door <105kg door <100kg door

Sprung Pivot Closer



9800 Pivotica
Includes top pivot guide

STOCKED **SS**

Hydraulic Pivot Closers

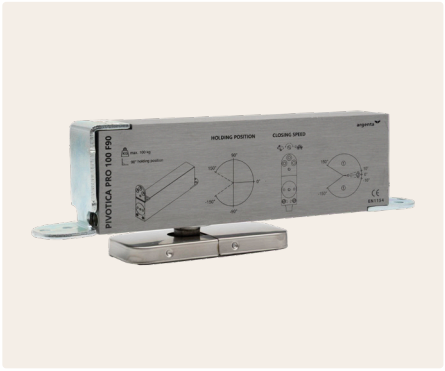

9801 Pivotica Pro 100
Includes top pivot guide

9805 Pivotica Pro 150
Includes top pivot guide

STOCKED **SS**

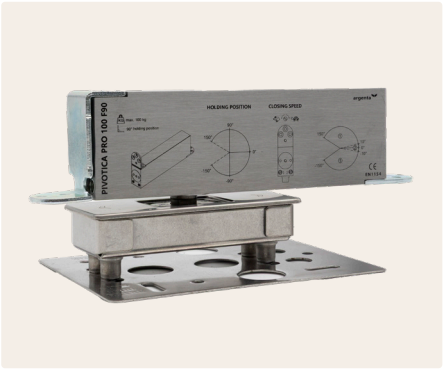

9801-BI Pivotica Pro 100
Built-in floor mount
Includes top pivot guide

STOCKED **SS**

ARLU Pivot Closers Technical Information

Specs	Pivotica	Pivotica Pro 100	Pivotica Pro 150
Code	9800	9801, 9801-BI	9805
Minimum door thickness	40mm	40mm	50mm
Door weight	20–45kg	40–100kg	100–150kg
Maximum door width	1500mm	2000mm^	<100kg: 2500mm >100kg: 2000mm
Maximum door height	3000mm	3000mm	3000mm
Fixed positions	45°, 90°	90°	90°
Depth adjustment	N/A	-3 / +3mm	-3 / +3mm
Width adjustment	N/A	-3 / +3mm	-3 / +3mm
Alignment	N/A	-4 / +4°	-4 / +4°

Maximum 1000mm to door edge from pivot point.
^Central position of the hinge for a floor mounted hinge.

Cover Plates



9803 Pivotica Pro 100 Cover Plates

9807 Pivotica Pro 150 Cover Plates

STOCKED **BLK**

Scan here to learn more about ARLU

HINGES

Stainless Steel



5904 Loose Pin
89mm × 60mm × 2mm
¼" radius corners
Comes with 18mm and 25mm screws

STOCKED BLK, CCB, **GN**, MSB, SS
SIGNATURE AB, DRB, NB, OR, PB, PC, RB, RLB, UB, USB



5920 Bearing Hinge
100mm × 75mm × 2.5mm

5921 Bearing Hinge
100mm × 100mm × 2.5mm

STOCKED BLK, CCB, GN, MSB, **SS**

5921 only available in BLK and SS.

Lift Off Hinges



5910 Lift Off Hinge - Left Handed
100mm × 75mm × 2.5mm

STOCKED BLK, BN, GN, MSB
SIGNATURE AB, DRB, NB, OR, PB, PC, **RB**, RLB, UB, USB



5911 Lift Off Hinge - Right Handed
100mm × 75mm × 2.5mm

STOCKED BLK, BN, GN, MSB
SIGNATURE AB, **DRB**, NB, OR, PB, PC, RB, RLB, UB, USB

Solid Brass



5906 Loose Pin Flat Tip
100mm × 75mm × 2.5mm
Comes with 25mm and 30mm screws

STOCKED BLK, BN, CCB, GN, MSB, PB
SIGNATURE AB, DRB, NB, OR, PC, RB, **RLB**, UB, USB



5902 Fixed Pin Flat Tip
100mm × 75mm × 2.5mm
Comes with 25mm and 30mm screws

STOCKED BLK, BN, CCB, GN, MSB, PB
SIGNATURE AB, DRB, NB, **OR**, PC, RB, RLB, UB, USB



5914 Fixed Pin Flat Tip
100mm × 125mm × 4mm

5915 Fixed Pin Flat Tip
100mm × 150mm × 4mm

STOCKED BLK, BN, GN
SIGNATURE AB, DRB, MSB, NB, OR, PB, PC, RB, RLB, UB, **USB**

Stocked Finishes

NZ 1–2 day lead time | **AU** 7 day lead time

- AB Antique Bronze
- BLK Matt Black
- BN Brushed Nickel
- CCB Cocoa Bronze
- GN Graphite Nickel
- MSB Matt Satin Brass
- OR Oil Rubbed Bronze
- PB Polished Brass
- SS Stainless Steel

Signature Finishes

NZ 14 day lead time | **AU** 21 day lead time

- AB Antique Bronze
- DRB Dark Roman Brass
- MSB Matt Satin Brass
- NB Natural Bronze
- OR Oil Rubbed Bronze
- PB Polished Brass
- PC Powdercoat
- RB Roman Brass
- RLB Rumbled Brass
- UB Unlacquered Brass
- USB Unlacquered Satin Brass

NZ 0800 607 028
AU 1800 841 643

hello@windsorhardware.co.nz
hello@windsorhardware.com.au

windsorhardware.co.nz
windsorhardware.com.au

Windsor